

itl boulder

THE LIGHT CENTER OF THE INDUSTRY SINCE 1955

INDEPENDENT TESTING LABORATORIES, INC.
3386 LONGHORN ROAD, BOULDER, CO 80302 USA

PHONE: (303)442-1255 • FAX: (303)449-5274 • E-MAIL: itl@itlboulder.com • WEBSITE: www.itlboulder.com

REPORT NUMBER: ITL62866

DATE: 08/04/09

PREPARED FOR: NEXXUS LIGHTING, INC.

CATALOG NUMBER: AACMR16WW60


LAMP: ONE MR-16 STYLE BI-PIN BASE LED LAMP, MOLDED FINNED WHITE PLASTIC BODY, ONE WHITE CIRCUIT BOARD WITH 39 VERTICAL BASE-UP WHITE LIGHT EMITTING DIODES (LEDS), MULTIPLE METAL POSTS BETWEEN UPPER AND LOWER HOUSING, FROSTED FLAT PLASTIC LENS, VERTICAL BASE-UP POSITION.

TOTAL INPUT WATTS = 3.30 AT 12.0 VOLTS AC

NOTE: DATA SHOWN IS ABSOLUTE FOR THE SAMPLE PROVIDED AT RATED INPUT VOLTAGE (12VAC, 60Hz) TO THE LAMP.

TEST PROCEDURE: IESNA LM-79-08

TEST DISTANCE = 25.25 FEET

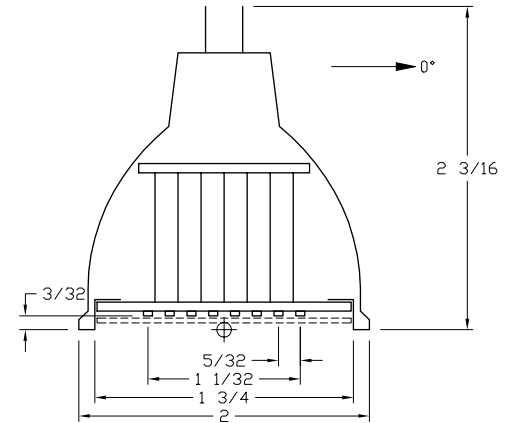

DEG	CANDELA	LUMENS
0	55.5	
5	55.4	5.3
15	53.5	15.1
25	49.5	22.8
35	43.6	27.3
45	35.7	27.5
55	26.5	23.7
65	16.9	16.8
75	8.2	8.7
85	1.1	1.5
90	0.0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0- 30	43.2	29.1
0- 40	70.5	47.4
0- 60	121.7	81.9
0- 90	148.6	100.0
90-180	0.0	0.0
0-180	148.6	100.0

EFFICACY = 45.0 Lm/W

CIE TYPE - DIRECT

LUMINAIRE SPACING CRITERION = 1.3

BEAM ANGLE (50%) : 107.3 DEGREES

FIELD ANGLE (10%) : 156.7 DEGREES


LUMINOUS DIAMETER: 1.750

LUMINANCE DATA IN CANDELA/SQ M

ANGLE AVERAGE

IN DEG

45	32523.
55	29762.
65	25760.
75	20409.
85	8130.

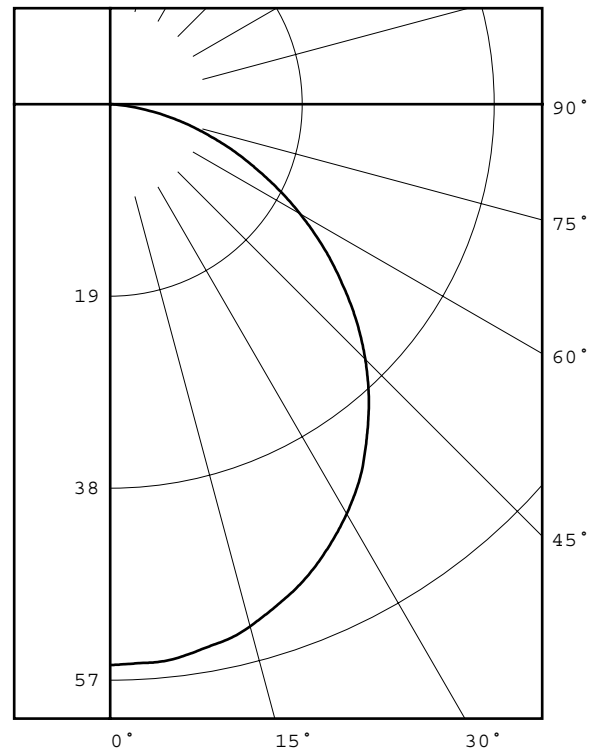

Checked *N.WHITE*

Approved *R.BEATTIE*



INDEPENDENT TESTING LABORATORIES, INC.
 3386 LONGHORN ROAD, BOULDER, CO 80302 USA

PHONE: (303)442-1255 • FAX: (303)449-5274 • E-MAIL: itl@itlboulder.com • WEBSITE: www.itlboulder.com

REPORT NUMBER: ITL62866
 PREPARED FOR: NEXXUS LIGHTING, INC.

DATE: 08/04/09

CANDELA DISTRIBUTION

	0.0
0.0	55.5
2.5	55.4
5.0	55.4
7.5	55.1
10.0	54.6
12.5	54.2
15.0	53.5
17.5	52.6
20.0	51.7
22.5	50.7
25.0	49.5
27.5	48.2
30.0	46.8
32.5	45.3
35.0	43.6
37.5	41.7
40.0	39.8
42.5	37.8
45.0	35.7
47.5	33.5
50.0	31.2
52.5	28.8
55.0	26.5
57.5	24.1
60.0	21.7
62.5	19.3
65.0	16.9
67.5	14.6
70.0	12.4
72.5	10.2
75.0	8.2
77.5	6.2
80.0	4.3
82.5	2.5
85.0	1.1
87.5	0.3
90.0	0.0

ZONAL LUMEN SUMMARY

0- 5	1.
5- 10	4.
10- 15	6.
15- 20	9.
20- 25	11.
25- 30	12.
30- 35	13.
35- 40	14.
40- 45	14.
45- 50	14.
50- 55	13.
55- 60	11.
60- 65	9.
65- 70	7.
70- 75	5.
75- 80	3.
80- 85	1.
85- 90	0.



INDEPENDENT TESTING LABORATORIES, INC.
 3386 LONGHORN ROAD, BOULDER, CO 80302 USA

PHONE: (303)442-1255 • FAX: (303)449-5274 • E-MAIL: itl@itlboulder.com • WEBSITE: www.itlboulder.com

REPORT NUMBER: ITL62866

DATE: 08/04/09

PREPARED FOR: NEXXUS LIGHTING, INC.

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

EFFECTIVE FLOOR CAVITY REFLECTANCE 0.20

RC	80				70				50			30			10			0		
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0	
0	120	120	120	120	120	117	117	117	117	117	112	112	112	107	107	107	103	103	103	101
1	110	106	101	98	98	107	103	100	96	99	96	93	95	93	90	91	89	88	85	85
2	100	92	86	80	80	98	90	84	79	87	82	77	84	79	75	81	77	74	72	72
3	92	81	73	67	67	89	80	72	66	77	70	65	74	68	64	71	67	63	61	61
4	84	72	63	57	57	82	71	63	56	68	61	56	66	60	55	64	58	54	52	52
5	77	65	56	49	49	75	63	55	49	61	54	48	59	53	48	57	52	47	45	45
6	71	58	49	43	43	70	57	49	43	55	48	42	54	47	42	52	46	41	39	39
7	66	53	44	38	38	65	52	44	38	50	43	37	49	42	37	48	41	37	35	35
8	62	48	40	34	34	60	47	39	34	46	39	33	45	38	33	44	38	33	31	31
9	58	44	36	30	30	56	44	36	30	42	35	30	41	35	30	40	34	30	28	28
10	54	41	33	28	28	53	40	33	27	39	32	27	38	32	27	37	31	27	25	25

ALL CANDELA, LUMENS, LUMINANCE, AND VCP VALUES IN THIS REPORT ARE BASED ON ABSOLUTE PHOTOMETRY. THE COEFFICIENT OF UTILIZATION VALUES ARE BASED ON THE TOTAL ABSOLUTE LUMEN OUTPUT OF THIS LUMINAIRE SAMPLE.




REPORT NUMBER: ITL62866


DATE: 08/04/09

PREPARED FOR: NEXXUS LIGHTING, INC.

CONE OF LIGHT DIAGRAM

(diameter shown is where fc value is half the fc at nadir)

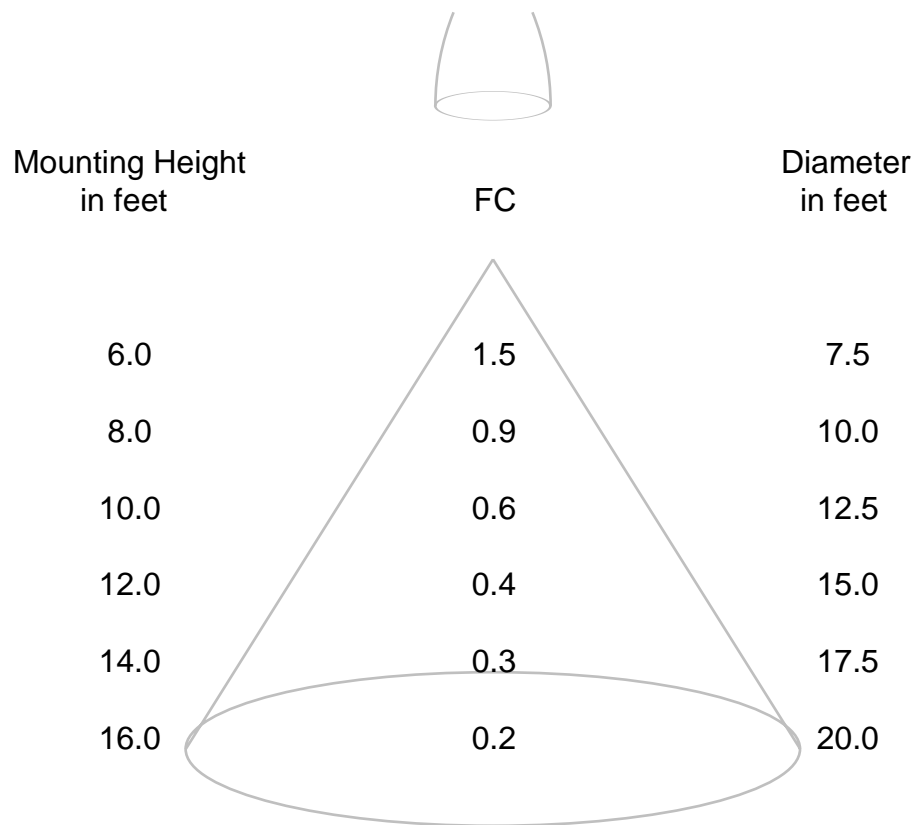



itl boulder
 THE LIGHT CENTER OF THE INDUSTRY SINCE 1955

INDEPENDENT TESTING LABORATORIES, INC.
 3386 LONGHORN ROAD, BOULDER, CO 80302 USA

PHONE: (303)442-1255 • FAX: (303)449-5274 • E-MAIL: itl@itlboulder.com • WEBSITE: www.itlboulder.com

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINATION

Values based on 5 foot mounting height

REPORT NO.: ITL62866A

DATE: 08/06/09


PREPARED FOR: NEXXUS LIGHTING, INC.

CATALOG NUMBER: AACMR16WW60

LAMP: ONE MR-16 STYLE BI-PIN BASE LED LAMP, MOLDED FINNED WHITE PLASTIC BODY, ONE WHITE CIRCUIT BOARD WITH 39 VERTICAL BASE-UP WHITE LIGHT EMITTING DIODES (LEDS), MULTIPLE METAL POSTS BETWEEN UPPER AND LOWER HOUSING, FROSTED FLAT PLASTIC LENS, VERTICAL BASE-UP POSITION.

NOTE: DATA SHOWN IS ABSOLUTE FOR THE SAMPLE PROVIDED AT RATED INPUT VOLTAGE (12VAC, 60Hz) TO THE LAMP.

Mounting Height Correction Factors	
mtg hgt	corr factor
3.0'	2.778
4.0'	1.563
5.0'	1.000
6.0'	0.694
7.0'	0.510

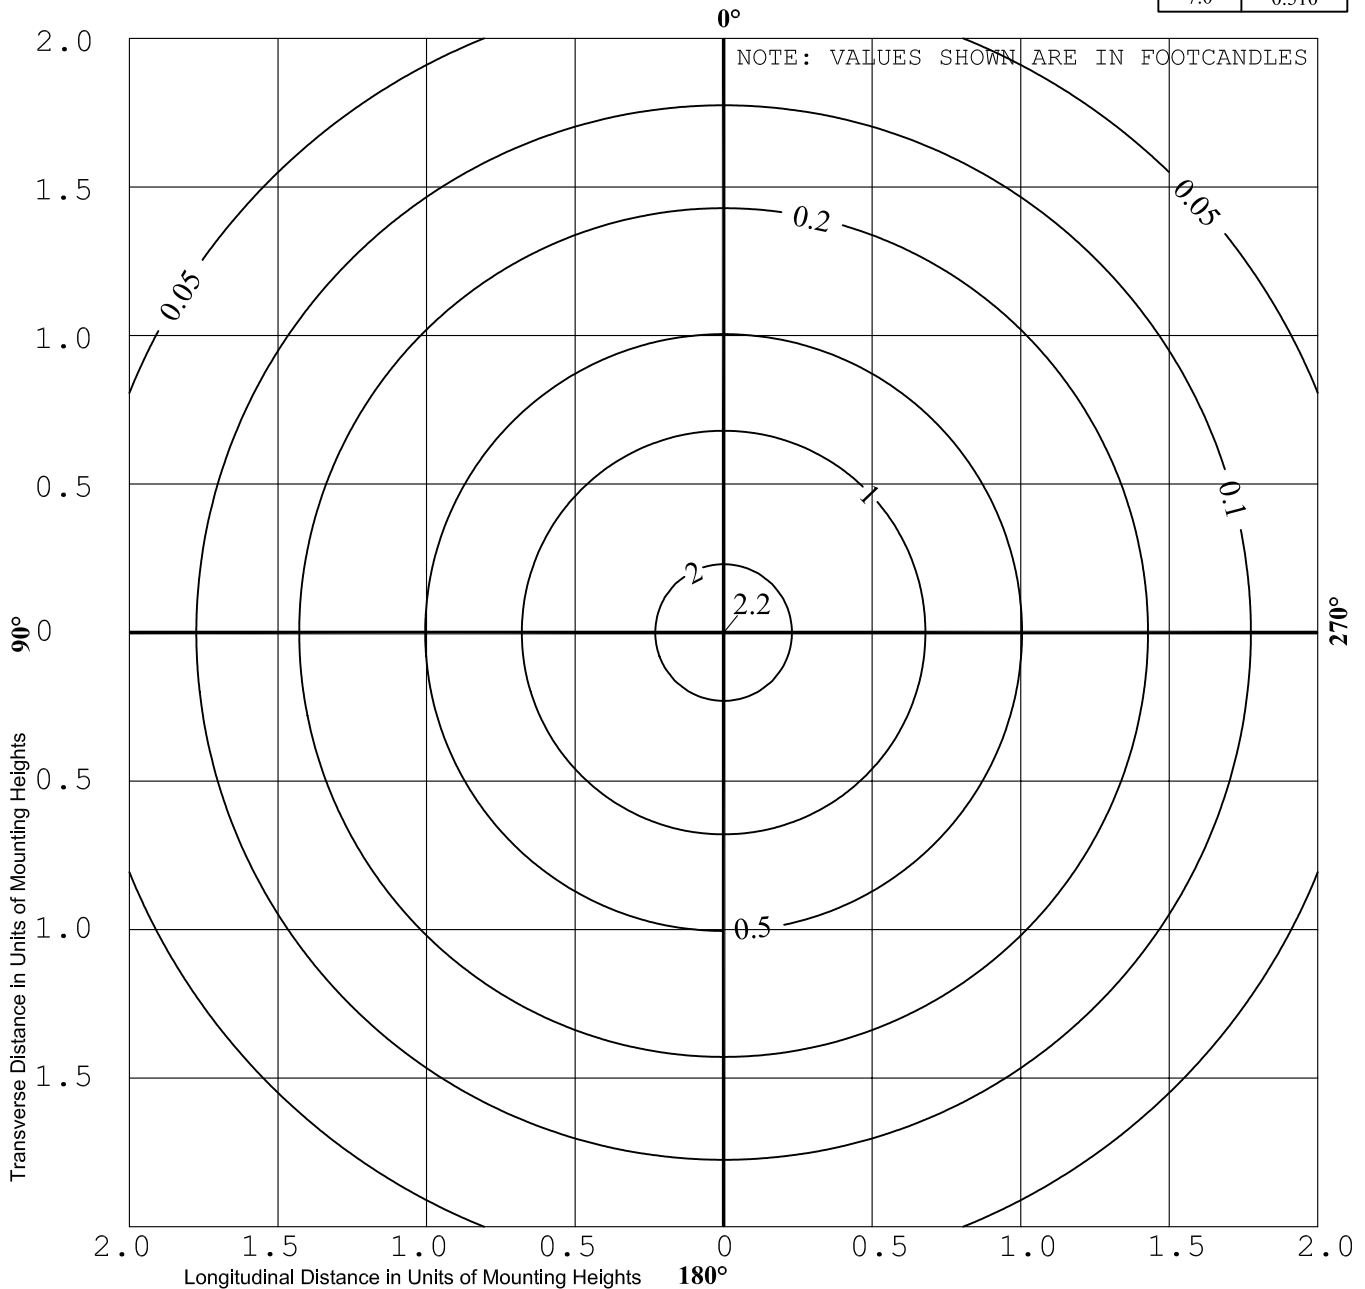


DIRECT CONTRIBUTION ONLY, NO INTERREFLECTED COMPONENTS (0% REFLECTANCES)

This lighting pattern represents illumination levels calculated from laboratory data taken under controlled condition in accordance with Illuminating Engineering Society approved methods. Actual performance of the manufacturer's luminaire may vary due to conditions including, but not limited to variation in line voltage, tolerance in lamps, and other variable field conditions.

ITL makes every effort to supply our customers with application work that is free from errors and without defects. However, since it is humanly impossible to be without error 100% of the time, the customer agrees to not hold ITL liable (for any error or defect) for more than the purchase price of these services.

THIS REPORT IS BASED ON PUBLISHED INDUSTRY PROCEDURES. FIELD PERFORMANCE MAY DIFFER FROM LABORATORY PERFORMANCE.



itl boulder

THE LIGHT CENTER OF THE INDUSTRY SINCE 1955

INDEPENDENT TESTING LABORATORIES, INC.
3386 LONGHORN ROAD, BOULDER, CO 80302 USA

PHONE: (303)442-1255 • FAX: (303)449-5274 • E-MAIL: itl@itlboulder.com • WEBSITE: www.itlboulder.com

REPORT NUMBER: ITL62877 Page 1 of 1
DATE: 8/04/09
PREPARED FOR: NEXXUS LIGHTING, INC.

CATALOG NUMBER: AACMR16WW60

LAMP: ONE MR-16 STYLE BI-PIN BASE LED LAMP, MOLDED FINNED WHITE PLASTIC BODY, ONE WHITE CIRCUIT BOARD WITH 39 VERTICAL BASE-UP WHITE LIGHT EMITTING DIODES (LEDS), MULTIPLE METAL POSTS BETWEEN UPPER AND LOWER HOUSING, FROSTED FLAT PLASTIC LENS, VERTICAL BASE-UP POSITION.

NOTE: DATA SHOWN IS ABSOLUTE FOR THE SAMPLE PROVIDED AT RATED INPUT VOLTAGE (12VAC, 60Hz) TO THE LAMP.

INSTRUMENTATION: Kikusui PCR500L AC Power Source
Yokogawa WT210 Digital Power Meter
Optronics OL770 Spectroradiometer
ITL 1.5 Meter Diameter Integrating Sphere

OBJECT OF TEST: Measure the Correlated Color Temperature (CCT), Color Rendering Index (CRI), Chromaticity Coordinates (x,y), ANSI C78.377 Duv, and input electrical parameters.

PROCEDURE: The lamp was provided by customer and the LEDs had an unknown number of burn hours. The lamp was mounted inside the integrating sphere with the lamp in a base up position (LEDS facing down). The lamp was allowed to stabilize at 12 VAC input. After stabilization occurred, CCT, CRI, x/y chromaticity coordinates, ANSI C78.377 Duv, and input electrical data were measured with the lamp operating in the integrating sphere. In order to measure the mean performance, twenty data sets were recorded and averaged within the OL770. Readings were taken with the lamp operating at 12 VAC input in a 25 +/-1 degree Celsius free air ambient and in accordance with IESNA LM-79-08. All data are traceable to the National Institute of Standards and Technology.

RESULTS:

SPECTRORADIOMETRIC	
Observer	CIE 1931 2 degree
Correlated Color Temp CCT (K)	3021
Chromaticity Ordinate x	0.4386
Chromaticity Ordinate y	0.4102
Color Rendering Index (CRI)	76
ANSI C78.377-2008 Duv	0.002
ELECTRICAL	
Input Voltage (Volts AC)	12.0
Input Current (mA AC)	289
Input Power (Watts)	3.31
Input Power Factor (%)	95.4

Checked: <u>N Gully</u>
Approved: <u>R Bergin</u>